


Fan Set Appearance



General specification

Fan Set / Motorized Impeller Model	SR-FS/MI-A-250-0.7
Rated Voltage	1×230 VAC / 50-60 Hz
Nominal Input Power / Rated Current	1.00 kW / 4.4 A
Revolutions: Min / Nominal	380 ÷ 3800 RPM
CAV K-factor	64
Temperature ranges: Storage / Operating	-30 ÷ +50 °C / -25 ÷ +50 °C
Front plate / Bracket material*	Magnelis / Powder coated steel
Installation position	Horizontal / Vertical shaft
Weight: FS / MI	8.7 / 5.4 kg

Motor

Type / Efficiency Class	Electronically Comutated, Brushless DC
Housing / Protection Degree	Die-cast aluminum
Overload protection	IP 54
Speed Control	Die-cast aluminum
Bearings	Inbuilt thermal limit
Bearings service life L ₁₀	63 400 (104 °F) / 31 700 (max. work. temperature)
Insulation class	F

Impeller

Fan Impeller Size, Blade design / No	250 mm / Aerofoil / 7
Spinning direction	Clockwise, wiewed from air inlet
Impeller / Inlet Cone material	Aluminum / Hot-dip galvanized steel
Balance grade	G 6,3 (ISO 1940-1) / BV-3 (ANSI S2.19-1989)

Information according to (EU) 327/2011 (ERP 2018)

Commission Regulation (EU) 327/2011 Requirements for fans driven by motors with an electric input power between 125 W and 500 kW.	1 Overall efficiency η_{es}	65.2%
	2 Measurement category	A
	3 Efficiency Category	Static
	4 Efficiency grade N: Actual / Req. 2015	70.6%
	5 Variable speed drive	Yes
	Power consumption P_{ed} [kW]	0.93 kW
	9 Air flow q_v [m ³ /h]	2 111 m ³ /h
	Pressure increase pfs	950 Pa
	10 Speed (rpm) n	3 800
	11 Specific ratio	1.01

AMCA Certification

Swiss Rotors Sp. z o.o. certifies that the

- SR-FS-A-250-0.7 Fan Set and
- SR-MI-A-250-0.7 Motorized Impeller

shown herein are licensed to bear the AMCA seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.


- Power rating does not include transmission losses.
- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A (Free inlet, free outlet).

Fan Efficiency Grade (FEG), AMCA 205-10


90




dP = f(V)

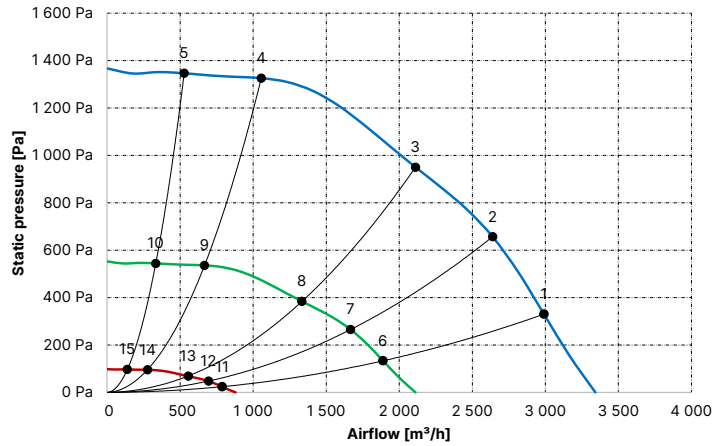

EPC = f(V)

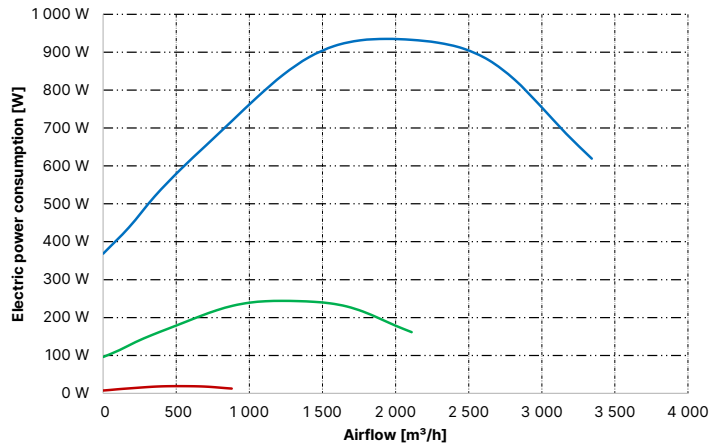

$\eta_{es} = f(V)$

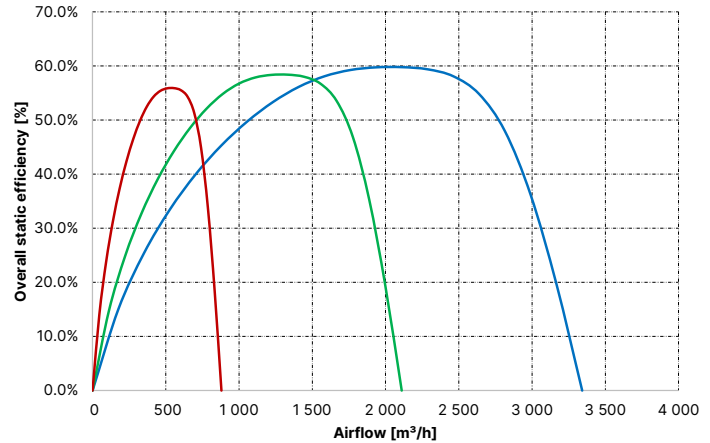

AMCA Certified Work Points

Point #	n RPM	V [m ³ /h]	dP [Pa]	I [A]	EPC [kW]	L _p A _{in} dB(A)	L _w A _{in} dB(A)	L _w A _{out} dB(A)	FEI
t	3 800	2 991	330	3.3	0.76	76.2	84.2	89.7	0.97
2	3 800	2 639	657	3.9	0.88	76.4	84.4	89.6	1.32
3	3 800	2 111	950	4.1	0.93	75.6	83.6	89.2	1.44
4	3 800	1 056	1 326	3.4	0.78	74.4	82.4	88.2	1.35
5	3 800	528	1 347	2.6	0.59	74.3	82.3	88.0	1.17
6	2 399	1 888	133	0.8	0.20	66.1	74.1	79.8	1.36
7	2 399	1 666	265	1.0	0.23	66.3	74.3	79.7	1.66
8	2 399	1 333	384	1.0	0.24	66.5	74.5	79.7	1.75
9	2 399	666	536	0.8	0.20	65.9	73.9	79.3	1.70
10	2 399	333	544	0.6	0.15	65.9	73.9	79.3	1.59
11	1 000	787	24	0.0	0.02	47.0	55.0	60.9	4.94
12	1 000	694	47	0.0	0.02	47.0	55.0	60.8	4.68
13	1 000	556	68	0.0	0.02	47.1	55.1	60.8	4.42
14	1 000	278	96	0.0	0.02	47.2	55.2	60.7	4.39
15	1 000	139	97	0.0	0.01	47.3	55.3	60.7	4.72

